



HPN TANKS

Super Flow™ Series


DESIGN FEATURES

- » Built-in pressure guage (Models SF100-SF10,000)
- » Interchangeable membrane with unique teired design
- » Available in 10, 16 and 25 bar pressure rating
- » Sizes from 100 to 10,000 liters
- » CE and ISO: 9001 approved

APPLICATIONS

These tanks are ideally suited for a wide range of applications including:

- » Booster systems
- » Thermal expansion
- » Irrigation systems
- » Hydraulic hammer arresting
- » Fire fighting

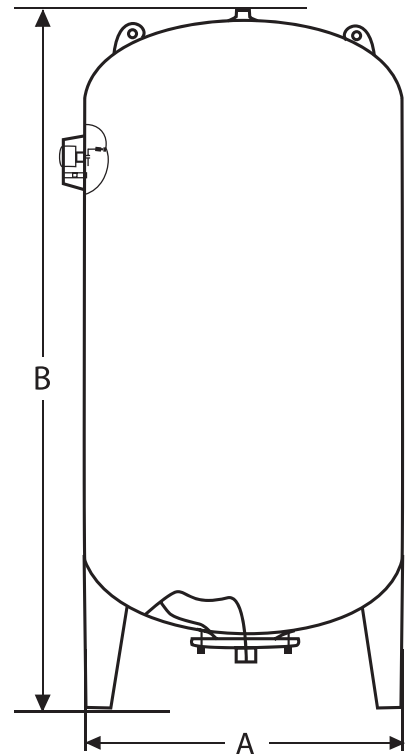

PRODUCT DETAILS

Model Numbers			Connection	Nominal Volume	Ship Weight			Dimensions	
Inline 10 bar models	Inline 16 bar models	Inline 25 bar models			10 bar	16 bar	25 bar	A	B
			inches	liters	kg	kg	kg	cm	cm
N/A	SMB-100LV	SUB-100LV	1"	100	NA	28	51	46	99
N/A	SMB-150LV	SUB-150LV	1"	150	NA	50	85	50	110
N/A	SMB-200LV	SUB-200LV	1 1/4"	200	NA	68	112	59	112
N/A	SMB-300LV	SUB-300LV	1 1/4"	300	NA	79	130	64	123
N/A	SMB-500LV	SUB-500LV	1 1/4"	500	NA	115	202	75	155
SFB-750LV	SMB-750LV	SUB-750LV	2	750	110	220	328	75	195
SFB-850LV	SMB-850LV	SUB-850LV	2	850	145	235	344	80	195
SFB-1000LV	SMB-1000LV	SUB-1000LV	2	1000	165	250	368	80	218
SFB-1500LV	SMB-1500LV	SUB-1500LV	2	1500	250	375	495	96	238
SFB-2000LV	SMB-2000LV	SUB-2000LV	2	2000	370	520	745	110	252
SFB-3000LV	SMB-3000LV	SUB-3000LV	2 1/2"	3000	550	780	910	120	280
SFB-4000LV	SMB-4000LV	SUB-4000LV	3	4000	730	980	1290	145	310
SFB-5000LV	SMB-5000LV	SUB-5000LV	3	5000	840	1140	1472	145	372
SFB-10000LV	SMB-10000LV	SUB-10000LV	4	10000	1920	2500	2980	160	575

TOLL FREE:
1800 102 4466

www.aventura.co.in